



Basics Palm Plus Product Data Sheet

Description


Basics Palm+ Basics Palm is a synthetic palm roofing system engineered for hotels, resorts, and large-scale hospitality projects. Designed to perform in the most demanding tropical climates, it has the fire resistance needed to protect your investment while delivering the authentic, luxury aesthetic your guests expect – season after season.

Features


- 15 Year Warranty
- Manufactured in the USA
- Fire Resistant
- No maintenance required
- Fast and easy installation

Components

Basics Palm + includes an inside pattern design that is visible on the interior ceiling when used in the horizontal or vertical batten configuration.

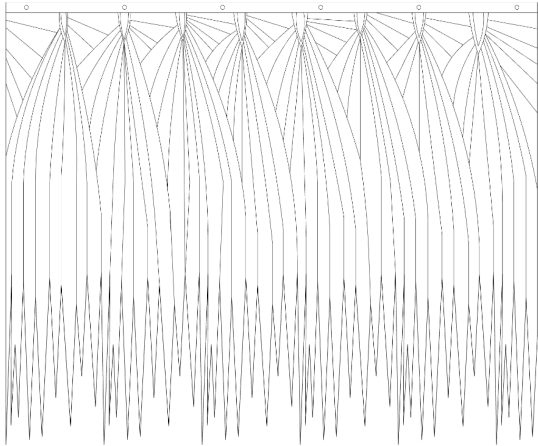

Fanned Field Shingle

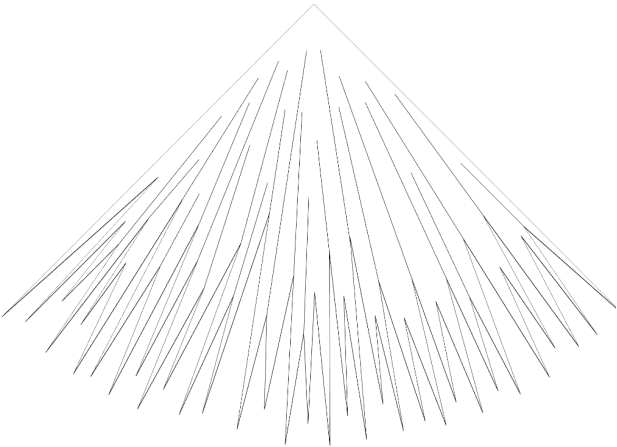

Hip/Ridge Shingle

<u>Part Numbers</u>	Palma Añejada
Fanned Field Shingle	TF-HD-08-103-FS
Hip/Ridge Shingle	TF-HD-01-103-HR



Specifications

Part	Size	Weight	Exposure	Coverage	Material
Field Shingle	32"x 27"x 0.030" (813mm x 686mm x 0.8mm)	1lb (0.45kg)	9" (229mm)	1.88 Sq.ft (0.174 m2) (5.72 pcs per m2)	HDPE
Hip/ Ridge Shingle	27"x 27"x 0.030" (686mm x 686mm x 0.8mm)	0.7lb (0.32kg)	6" (150mm)	.5LF	HDPE



Packaging & Storage

Part	Box	Bulk Stack
Field Shingle (All colors, and styles)	Box <u>Quantity:</u> 70pcs <u>Size:</u> 37"x 28"x 11" (940mm x 711mm x 280mm) <u>Weight:</u> 70 lbs (32kg) Pallet <u>Quantity:</u> 840pcs(12 boxes) <u>Size:</u> 40"x 48"x 89" (1016mm x 1219mm x 2260mm) <u>Weight:</u> 890 lbs (404kg)	Pallet Full pallets only <u>Quantity:</u> 1400 pcs <u>Size:</u> 40" x 48" "x 69" (1016mm x 1219mm x 2260mm) <u>Weight:</u> 1450 lbs (658 kg)
Hip/ Ridge Shingle (All colors, and styles)	Box <u>Quantity:</u> 100pcs <u>Size:</u> 37"x 28"x 11" (940mm x 711mm x 280mm) <u>Weight:</u> 70 lbs (32kg) Pallet <u>Quantity:</u> 1200pcs(12 boxes) <u>Size:</u> 40"x 48"x 89" (1016mm x 1219mm x 2260mm) <u>Weight:</u> 890 lbs (404kg)	Pallet -Full pallets only <u>Quantity:</u> 2000 pcs <u>Size:</u> 40" x 48" "x 80" (1016mm x 1219mm x 2260mm) <u>Weight:</u> 1500 lbs (658 kg)

Storage: Store Basics Palm shingles in a dry, well-ventilated, weather tight, location. Do not expose boxes to excessive moisture. Overstacking boxes or excessive moisture may cause boxes to collapse. Do not remove wrapping from bulk stack pallet until final placement at installation location.



Maintenance

Basics Palm was designed so that no maintenance is required to ensure the best performance. However, it is recommended to do an annual inspection and brush off any loose debris to keep your roof looking its best.


Warranty

Basics Palm has a 15-year limited warranty that covers faults in materials and workmanship according to warranty terms.




Application

Basics Palm is a universal system that can be installed on new construction or retrofitted to existing structures. The versatile design allows it to be applied to a number of roofing substrates, including the following: Horizontal batten, Plywood deck and Metal. Basics Palm is suitable for use on any sloped roof with a pitch of 4:12 (18°) or greater. The total thickness of the roof system when installed is 1-1/2" (38.1mm).

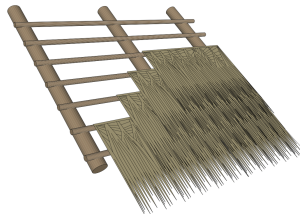

Horizontal Batten

Basics Palm installed over horizontal battens (9"/229mm O.C.) functions as both the waterproofing and interior ceiling finish. Recommended fastener (6 per shingle) 11-gauge 1.25" ring shank roofing nails / 1.25" # 8 truss head screw

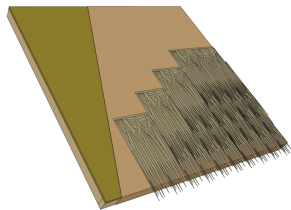


Plywood Deck

Basics Palm installed over min. 15/32" plywood deck (9"/229mm O.C.) granulated underlayment

Soprema Elastophene stick HR FR+ GR)

Recommended fastener (6 per shingle) 11 gauge 1.25" ring shank roofing nail / 1.25" #8 truss head screws.

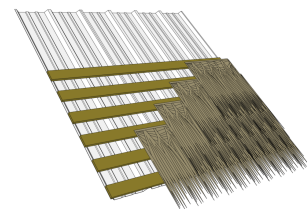

Metal

Basics Palm installed over metal deck, PT pine 1"x 4" battens (9"/229mm O.C.)

Recommended fastener (6 per shingle) 11 gauge 1" ring shank roofing nail / 1.25" #8 truss head screws.



Endureed Basics thatch manufactured by:
Global Innovation LLC

313 SW Windswept Glen
Lake City, Florida 32024

1-877-784-2824
endureed.com